






ATTACCO RAPIDO UNIVERSALE EUROSAFE MINI - VERSIONE IDRAULICA
EUROSAFE MINI UNIVERSAL QUICK COUPLER - HYDRAULIC VERSION
COUPLEUR EUROSAFE MINI - VERSION HYDRAULIQUE

REVERSIBLE



Versione idraulica Hydraulic Version Version hydraulique	* Solamente per larghezza attacchi benna ≥ 145 mm Only for bucket dipper width ≥ 145 mm Seulement pour largeur attaches godet ≥ 145 mm						
Modello / Model / Modèle	Code	≈ kg	Perno / Pin / Axe Ø mm	Interasse / Interaxis / Entraxe mm (min/max)	€	Gancio / Hook Crochet 3 - 5 t	Anello / Ring Manille 3,25 t
EURO SAFE 40 *	10Z040	65	40	170÷204 / 205÷239 / 240÷274 275÷309 / 310÷350	-	-	-
EURO SAFE 45 *	10Z045	80	45	220÷254 / 255÷289 / 290÷324 325÷359 / 360÷400	-	-	-
EURO SAFE 50	10Z050	85	50	235÷269 / 270÷304 / 305÷339 340÷380	-	-	-
EURO SAFE 55	10Z055	90	55	275 ÷ 315	-	-	-
EURO SAFE MIDI 60	10ZM60	95	60	275 ÷ 315	-	-	-

Coppia perni per aggancio benna compresa / Pair of pins for bucket coupling included / Jeu d'axes pour accrochage godet inclus
 Coppia perni supplementare a pg. 57 / Extra pair of pins at pg. 57 / Jeu d'axes supplementaire voir pg. 57






ATTACCO RAPIDO UNIVERSALE EUROSAFE MINI - VERSIONE MECCANICA

EUROSAFE MINI UNIVERSAL QUICK COUPLER - MECHANICAL VERSION

COUPLEUR EUROSAFE MINI - VERSION MÉCANIQUE

REVERSIBLE



Versione meccanica Mechanical Version Version mécanique	* Solamente per larghezza attacchi benna ≥ 145 mm Only for bucket dipper width ≥ 145 mm Seulement pour largeur attaches godet ≥ 145 mm						
Modello / Model / Modèle	Code	≈ kg	Perno / Pin / Axe Ø mm	Interasse / Interaxis / Entraxe mm (min/max)	€	Gancio / Hook Crochet 3 - 5 t	Anello / Ring Manille 3,25 t
EURO SAFE 40 *	10W040	65	40	170÷204 - 205÷239 240÷274 - 275÷309 - 310÷350	-	-	-
EURO SAFE 45 *	10W045	80	45	220÷254 - 255÷289 - 290÷324 325÷359 - 360÷400	-	-	-
EURO SAFE 50	10W050	85	50	235÷269 - 270÷304 - 305÷339 340÷380	-	-	-
EURO SAFE 55	10W055	90	55	275÷315	-	-	-
EURO SAFE MIDI 60	10WM60	95	60	275÷315	-	-	-

Coppia perni per aggancio benna compresa / Pair of pins for bucket coupling included / Jeu d'axes pour accrochage godet inclus
Coppia perni supplementare a pg. 57 / Extra pair of pins at pg. 57 / Jeu d'axes supplementaire voir pg. 57



ATTACCO RAPIDO UNIVERSALE EUROSAFE MINI - POWERTILT

EUROSAFE MINI UNIVERSAL QUICK COUPLER - POWERTILT

COUPLEUR EUROSAFE MINI - POWERTILT

REVERSIBLE









Nota / Note

Specifiche idrauliche
a pg. 288 - 293

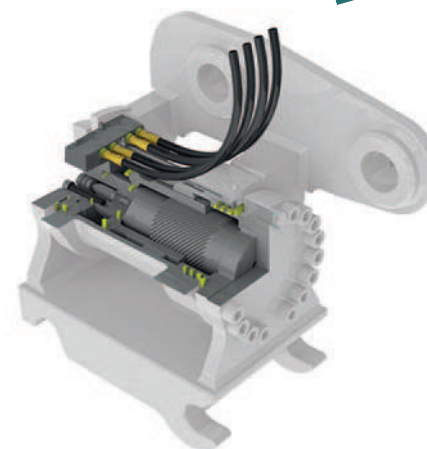Hydraulic specifications
at pg. 288 - 293

Spécifications hydrauliques
voir pg. 288 - 293



Versione idraulica Hydraulic version Version hydraulique	* Solamente per larghezza attacchi benna ≥ 145 mm Only for bucket dipper width ≥ 145 mm Seulement pour largeur attaches godet ≥ 145 mm								
Modello / Model / Modèle	Code	Perno / Pin / Axe Ø mm	Powertilt model	t Max	 Total	 ≈ kg	€	Gancio / Hook Crochet 3 - 5 t	Anello / Ring Manille 3,25 t
EUROSAFE 40 *	10DK40	40	PTA 050	3,0 ÷ 5,0	180°	120	-	-	-
EUROSAFE 40 *	10DY40	40	PTA 070	5,0 ÷ 7,0	180°	150	-	-	-
EUROSAFE 40 *	10DJ40	40	PTA 100	7,0 ÷ 10,0	180°	180	-	-	-
EUROSAFE 45 *	10DK45	45	PTA 050	3,0 ÷ 5,0	180°	135	-	-	-
EUROSAFE 45 *	10DY45	45	PTA 070	5,0 ÷ 7,0	180°	175	-	-	-
EUROSAFE 45 *	10DJ45	45	PTA 100	7,0 ÷ 10,0	180°	205	-	-	-
EUROSAFE 50	10DY50	50	PTA 070	5,0 ÷ 7,0	180°	180	-	-	-
EUROSAFE 50	10DJ50	50	PTA 100	7,0 ÷ 10,0	180°	225	-	-	-
EUROSAFE 50	10DW50	50	PTA 180	10,0 ÷ 18,0	120°	260	-	-	-
EUROSAFE 55	10DJ55	55	PTA 100	7,0 ÷ 10,0	180°	235	-	-	-
EUROSAFE MIDI 60	10DJM6	60	PTA 100	7,0 ÷ 10,0	180°	260	-	-	-
EUROSAFE MIDI 60	10DWM6	60	PTA 180	10,0 ÷ 18,0	120°	290	-	-	-

Coppia perni per aggancio benna compresa / Pair of pins for bucket coupling included / Jeu d'axes pour accrochage godet inclus

Coppia perni supplementare a pg. 57 / Extra pair of pins at pg. 57 / Jeu d'axes supplementaire voir pg. 57






ATTACCO RAPIDO UNIVERSALE EUROSAFE MINI - TILT ROTATOR

EUROSAFE MINI UNIVERSAL QUICK COUPLER - TILT ROTATOR

COUPLEUR EUROSAFE MINI - TILT ROTATOR

REVERSIBLE

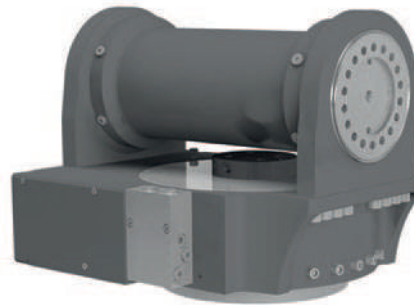

Nota / Note


Specifiche idrauliche
a pg. 288 - 293

Hydraulic specifications
at pg. 288 - 293

Spécifications hydrauliques
voir pg. 288 - 293

Versione idraulica
Hydraulic version
Version hydraulique

*** Solamente per larghezza attacchi benna ≥ 145 mm**
Only for bucket dipper width ≥ 145 mm
Seulement pour largeur attaches godet ≥ 145 mm



Modello / Model / Modèle	Code	Perno / Pin / Axe Ø mm	Tilt Rotator model	t Max		 Total	≈ kg	€	Gancio / Hook Crochet 3 - 5 t	Anello / Ring Manille 3,25 t
EUROSAFE 40 *	10TD40	40	TR 35	2,4 ÷ 3,5	360°	110°	155	-	-	-
EUROSAFE 40 *	10TF40	40	TR 60	3,0 ÷ 6,0	360°	110°	215	-	-	-
EUROSAFE 45 *	10TF45	45	TR 60	3,0 ÷ 6,0	360°	110°	230	-	-	-
EUROSAFE 45 *	10TH45	45	TR 90	5,0 ÷ 9,0	360°	110°	290	-	-	-
EUROSAFE 50	10TF50	50	TR 60	3,0 ÷ 6,0	360°	110°	235	-	-	-
EUROSAFE 50	10TH50	50	TR 90	5,0 ÷ 9,0	360°	110°	295	-	-	-
EUROSAFE 55	10TH55	55	TR 90	5,0 ÷ 9,0	360°	110°	300	-	-	-
EUROSAFE 55	10TL55	55	TR 120	8,0 ÷ 12,0	360°	110°	330	-	-	-

Coppia perni per aggancio benna compresa / Pair of pins for bucket coupling included / Jeu d'axes pour accrochage godet inclus

Coppia perni supplementare a pg. 57 / Extra pair of pins at pg. 57 / Jeu d'axes supplementaire voir pg. 57