



ATTACCO RAPIDO DEDICATO VTN SAFE
DEDICATED QUICK COUPLER VTN SAFE
ATTACHE RAPIDE VTN SAFE



REVERSIBLE

Modello / Model / Modèle	Tipo / Type / Type	Code	≈ kg	€	 Gancio / Hook / Crochet 10 t	 Anello / Ring / Manille 9,5 t
VTN SAFE V-55 / V-68 t 12-31	Versione meccanica Mechanical version Version mécanique	10W075AR63	290	-	-	-
VTN SAFE V-55 / V-68 t 12-31	Versione Idraulica Hydraulic Version Version Hydraulique	10Z075AR63	290	-	-	-



Adattatore Adapter Adapteur	APAKAR5P0	Kg 160	-
-----------------------------------	-----------	--------	---




Perno di adattamento / Adjustment Pin / Axe d'adaptation	
Ø 75 mm	-

Perno di adattamento alla versione 11EI
 Adjustment pin with 11EI version
 Axe d'adaptation pour la version 11EI



ATTACCO RAPIDO DEDICATO VTN SAFE - POWERTILT
DEDICATED QUICK COUPLER VTN SAFE - POWERTILT
ATTACHE RAPIDE VTN SAFE - POWERTILT

REVERSIBLE

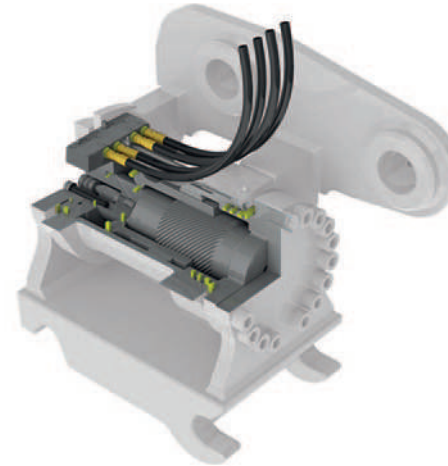



Nota / Note

Specifiche idrauliche a pg. 288 - 293

Hydraulic specifications at pg. 288 - 293


Spécifications hydrauliques voir pg. 288 - 293


Modello / Model / Modèle	Code	Perno / Pin / Axe Ø mm	Powertilt model	t Max	Total	≈ kg	€	 Gancio / Hook / Crochet 10 t	 Anello / Ring / Manille 9,5 t
VTN SAFE	10DW75AR63	75	PTA 180	11,0 ÷ 18,0	120°	550	-	-	-
VTN SAFE	10DZ75AR63	75	PTA 240	18,0 ÷ 24,0	120°	650	-	-	-
VTN SAFE	10DX75AR63	75	PTA 300	24,0 ÷ 32,0	120°	740	-	-	-



ATTACCO RAPIDO DEDICATO VTN SAFE - TILT ROTATOR
DEDICATED QUICK COUPLER VTN SAFE - TILT ROTATOR
ATTACHE RAPIDE VTN SAFE - TILT ROTATOR

REVERSIBLE

TILT

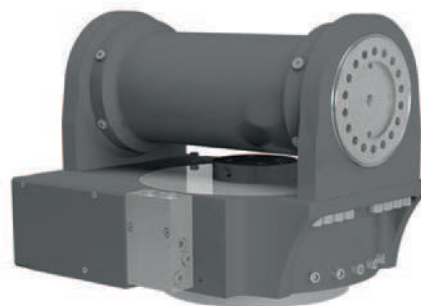ROTATING








Nota / Note

Specifiche idrauliche a pg. 288 - 293

Hydraulic specifications at pg. 288 - 293

Spécifications hydrauliques voir pg. 288 - 293

Modello / Model / Modèle	Code	Perno / Pin / Axe Ø mm	Powertilt model	t Max		 Total	 ≈ kg	€	 Gancio / Hook Crochet 10 t	 Anello / Ring Manille 9,5 t
VTN SAFE	10TN75AR63	75	TR 150	11,0 ÷ 15,0	360°	110°	550	-	-	-
VTN SAFE	10TP75AR63	75	TR 200	14,0 ÷ 20,0	360°	110°	630	-	-	-
VTN SAFE	10TR75AR63	75	TR 270	19,0 ÷ 27,0	360°	110°	810	-	-	-